

POP-202-RG – 24VDC – BULBO: 24V 8W – SERIE PR- DIAM. 56MM

PR Series D56mm Bulb type Tower Light



Suitable for displaying the operation status of machines tools, Industrial machines, special purpose machines, automatic production line, robot, etc.



The unique vibration absorbing structure using new material reduces vibration and impact from all machines and devices, greatly extending bulb life.



Product Feature

- Shock and Vibration Tolerant
- Option to use LED bulb
- Shock and Vibration Tolerant & IP20 Ingress Protection

Ordering information

PR P F - 3 02 - RYG

① Mounting Style

P	D18mm Aluminum pole + Plastic mount base
G	Plastic mount base
M	M18 Screw Aluminum pole

② Light Style

No mark	Steady
F	Flashing
B	Steady + Buzzer
Z	Steady + Flashing + Buzzer

④ Power Supply

01	12VAC/DC
02	24VAC/DC
10	110VAC
20	220VAC

③ Number of Stack

1	1 Stack	4	4 Stacks
2	2 Stacks	5	5 Stacks
3	3 Stacks		

⑤ Lens Color (Top to Bottom)

R	Red	B	Blue
Y	Yellow	C	Clear
G	Green		

Specifications

Function	Steady, Flashing, Buzzer
Power supply	12VAC/DC, 24VAC/DC, 110VAC, 220VAC(50~60Hz)
Maximum stacked quantity	May be ordered as 1, 2, 3, 4 or 5 stacks
Lens color	Red, Yellow, Green, Blue, Clear
Buzzer volume	80±5dB at 1M, Buzzer Continuous sound (pi - -)
Flashing rate	80±10 times / minute
Ambient temperature	-15°C ~ 40°C
Storage ambient temperature	-25°C ~ 70°C
Ambient humidity	45 ~ 85% RH
Protection structure	IP20
Connection	110/220VAC: VSF0.75mm (Power supply wire only) 12/24VAC/DC: 1007UL/220AWG


Current Consumption

Power Supply	12VAC	24VAC	110VAC	220VAC
Current Consumption (±10%)				
1 Stack	0.8A	0.4A	0.08A	0.04A
2 Stacks	1.7A	0.8A	0.17A	0.08A
3 Stacks	2.5A	1.2A	0.25A	0.12A
4 Stacks	3.3A	1.7A	0.33A	0.17A
5 Stacks	4.2A	2.1A	0.40A	0.20A


PR series Bulb Replacement Parts

Energy Used: 8 watts Base Type: Single Contact (BALS)	Input Voltage	Bulb	Part no.
Color / Finish: Clear Length: 45mm Width: 16mm	12V type	12V 8W	NAB-T15-S-012-08
	24V type	24V 8W	NAB-T15-S-024-08
	110V type	130V 8W	NAB-T15-S-130-08
	220V type	240V 8W	NAB-T15-S-240-08

Dimensions <Unit: mm>

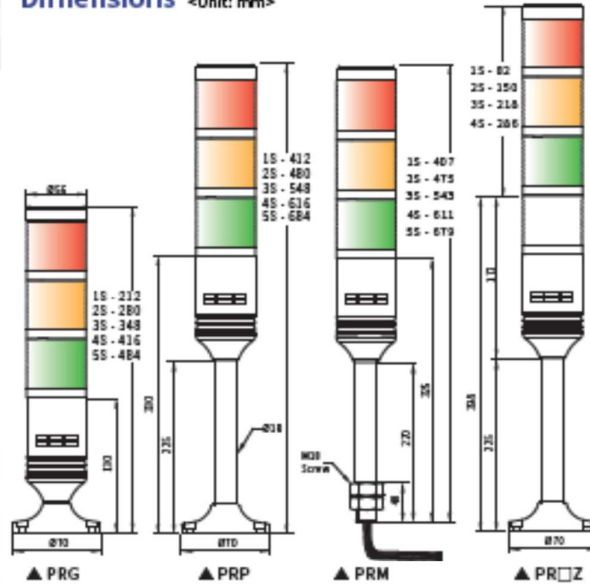

Mounting hole based on Mount base



Optional Parts Wall Mounting Bracket




apply PRM type only
MAM-DS25
Steel

See Page 80 ~ 81 >>
for Mounting Options
and Accessories.

Connection Diagram


12VAC/DC, 24VAC/DC, 110VAC, 220VAC

Steady

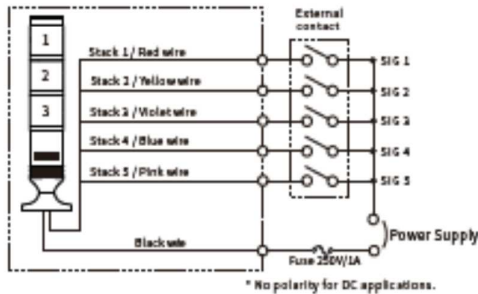


12VAC/DC, 24VAC/DC, 110VAC, 220VAC

Steady / Buzzer

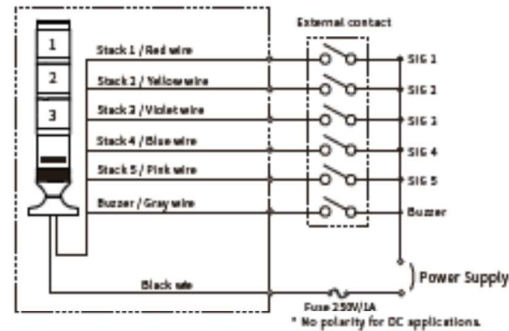


12VAC/DC, 24VAC/DC, 110VAC, 220VAC

Flashing

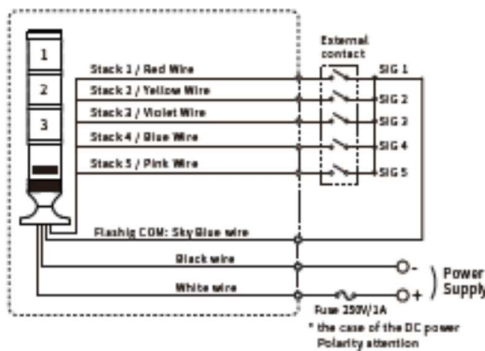


12VAC/DC, 24VAC/DC,
110VAC, 220VAC

Steady / Flashing / Buzzer

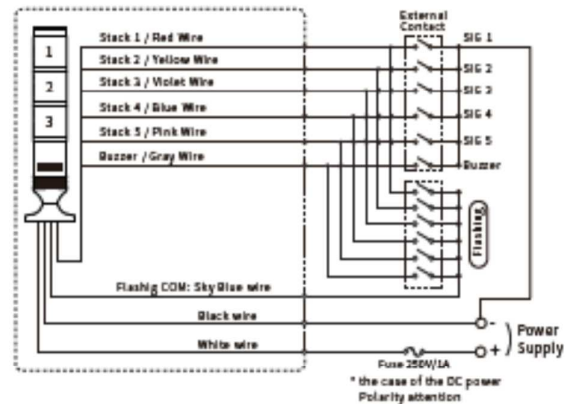

45mm PS Series Bulb Replacement Method

Push to open the bulb housing fixed inside the mount groove using hands or tools.
This allows easily replacing the bulb.

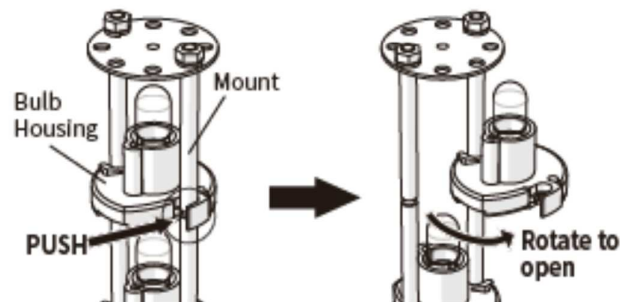

Caution

Wear protective gloves, replace the bulb after shutting off the power.
There is a risk of breakage of the glass.