


# Eaton C22G32

Catalog Number: C22G32

Eaton Bussmann series low voltage 22 x 58 mm cylindrical/ferrule fuse, rated at 690 Volts AC, 32 Amps, 80 kA Breaking capacity, class gG/gL, without indicator, compatible with a CH22 Modular fuse holder

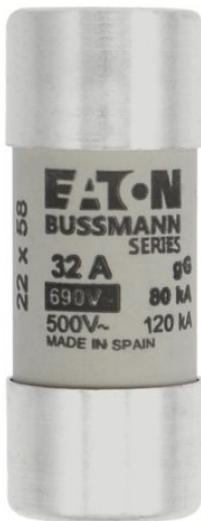

## Especificaciones generales

Product Name	Catalog Number
Eaton Bussmann series low voltage cylindrical fuse	C22G32
UPC	Product Length/Depth
051712754460	58 mm
Product Height	Product Width
22.2 mm	22.2 mm
Product Weight	Warranty
53.6 g	1 year limited
Compliances	Certifications
CE Marked	IEC 60269
GoST-R	Model Code
RoHS Compliant	CYLINDRICAL FUSE 22 x 58 32A GG 690V AC

## Product specifications

## Recursos

Fuse indicator

Other

Construction size

22 mm x 58 mm

Rated voltage AC

690 V

Connection

Ferrule end x ferrule end

Quantity

10

Current type

AC

Suitable for

CH22 Modular fuse holder

Material

Ceramic

Mounting method

22 x 58 mm CH Modular fuse holder

Release characteristic

Other

Amperage Rating

32 A

Frequency rating - max

62 Hz

Utilization category

gG (cable protection/equipment protection)

Watt losses

3.5 W

Fuse type

C22G

Type

fuse

Fuse shape

Cylindrical

**Breaking capacity**

80 kA

**Fuse size**

22 x 58 mm

**Frequency rating - min**

45 Hz

**Class**

Class C gL/gG

**Voltage rating**

690 V

**Application**

for industrial applications

for general purpose use

**Voltage type**

AC



Eaton Corporation plc

Eaton House

30 Pembroke Road

Dublin 4, Ireland

Eaton.com

© 2023 Eaton. All Rights Reserved.

Eaton is a registered trademark.

All other trademarks are property of their respective owners.



Eaton.com/socialmedia