


Eaton C22G80

Catalog Number: C22G80

Eaton Bussmann series low voltage 22 x 58 mm cylindrical/ferrule fuse, rated at 500 Volts AC, 80 Amps, 120 kA Breaking capacity, class gG/gL, without indicator, compatible with a CH22 Modular fuse holder

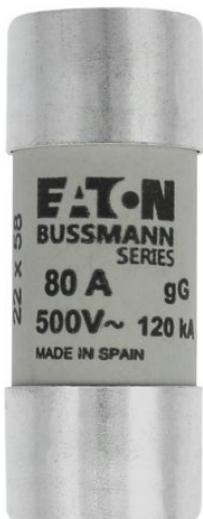

General specifications

Product Name	Catalog Number
Eaton Bussmann series low voltage cylindrical fuse	C22G80
UPC	051712754507
EAN	5027590495561
Product Length/Depth	58 mm
Product Height	22.2 mm
Product Width	22.2 mm
Product Weight	Warranty
55 g	1 year limited
Compliances	Certifications
CE Marked	IEC 60269
GoST-R	
RoHS Compliant	

Product specifications

Fuse indicator	Catalogs
Other	Bussmann series complete full line catalog no. 1007
Construction size	Compliance information
22 mm x 58 mm	UKCA C08G, C08M, etc cylindrical fuselinks
Rated voltage AC	CE C08G, C08M, etc cylindrical fuselinks
500 V	Technical data sheets
Connection	720115 Cylindrical fuses
Ferrule end x ferrule end	
Quantity	
10	
Current type	
AC	
Suitable for	
CH22 Modular fuse holder	
Material	
Ceramic	
Mounting method	
22 x 58 mm CH Modular fuse holder	
Release characteristic	
Other	
Amperage Rating	
80 A	
Frequency rating - max	
62 Hz	
Utilization category	
gG (cable protection/equipment protection)	
Watt losses	
7.8 W	
Fuse type	
C22G	
Type	
fuse	
Fuse shape	
Cylindrical	

Resources

Breaking capacity

120 kA

Fuse size

22 x 58 mm

Frequency rating - min

45 Hz

Class

Class C gL/gG

Voltage rating

500 V

Application

for industrial applications

for general purpose use

Voltage type

AC



Eaton Corporation plc
Eaton House
30 Pembroke Road
Dublin 4, Ireland
Eaton.com
© 2023 Eaton. All Rights Reserved.

Eaton is a registered trademark.

All other trademarks are property of their respective owners.



Eaton.com/socialmedia