




94.04

Approvals
(according to type):



094.91.3



Screw terminal (Box clamp) socket panel or 35 mm (EN 60715) rail mount	94.02 Blue	94.02.0 Black	94.03 Blue	94.03.0 Black	94.04 Blue	94.04.0 Black
For relay type	55.32		55.33		55.32, 55.34	



Accessories

Metal retaining clip	094.71					
Plastic retaining and release clip (supplied with socket - packaging code SPA)	094.91.3	094.91.30	094.91.3	094.91.30	094.91.3	094.91.30
6-way jumper link	094.06	094.06.0	094.06	094.06.0	094.06	094.06.0
Identification tag	094.00.4					
Modules (see table below)	99.02					
Timer modules (see table below)	86.30					
Sheet of marker tabs for retaining and release clip 094.91.3	060.72					

Technical data

Rated values	10 A - 250 V	
Dielectric strength	2 kV AC	
Protection category	IP 20	
Ambient temperature	°C -40...+70	
 Screw torque	Nm 0.5	
Wire strip length	mm 8	
Max. wire size for 94.02/03/04 sockets	solid wire	stranded wire
	mm² 1x6 / 2x2.5	1x4 / 2x2.5
	AWG 1x10 / 2x14	1x12 / 2x14

060.72

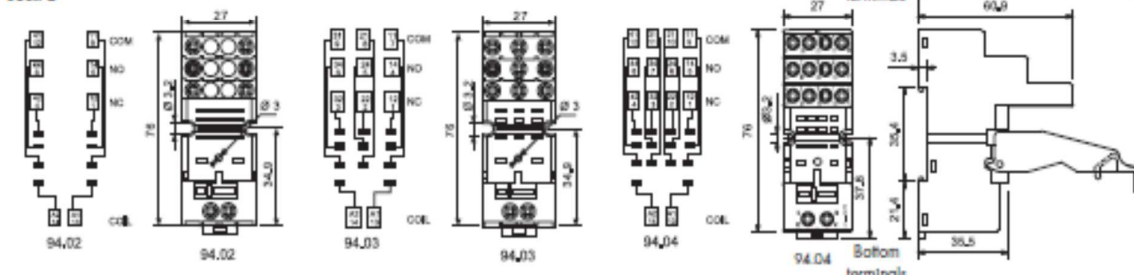

094.06

6-way jumper link for 94.02, 94.03 and 94.04 sockets	094.06 (blue)	094.06.0 (black)
Rated values	10 A - 250 V	



86.30



99.02

Approvals
(according to type):



DC Modules with
non-standard polarity
(+A2) on request.

86 series timer modules	
(12...24)V AC/DC; Bi-function: AI, DI; (0.05s...100h)	86.30.0.024.0000
(110...125)V AC; Bi-function: AI, DI; (0.05s...100h)	86.30.8.120.0000
(230...240)V AC; Bi-function: AI, DI; (0.05s...100h)	86.30.8.240.0000

Approvals

(according to type):

99.02 coil indication and EMC suppression modules for 94.02, 94.03 and 94.04 sockets

Diode (+A1, standard polarity)	{6...220}V DC	99.02.3.000.00
LED	{6...24}V DC/AC	99.02.0.024.59
LED	{28...60}V DC/AC	99.02.0.060.59
LED	{110...240}V DC/AC	99.02.0.230.59
LED + Diode (+A1, standard polarity)	{6...24}V DC	99.02.9.024.99
LED + Diode (+A1, standard polarity)	{28...60}V DC	99.02.9.060.99
LED + Diode (+A1, standard polarity)	{110...220}V DC	99.02.9.220.99
LED + Varistor	{6...24}V DC/AC	99.02.0.024.98
LED + Varistor	{28...60}V DC/AC	99.02.0.060.98
LED + Varistor	{110...240}V DC/AC	99.02.0.230.98
RC circuit	{6...24}V DC/AC	99.02.0.024.09
RC circuit	{28...60}V DC/AC	99.02.0.060.09
RC circuit	{110...240}V DC/AC	99.02.0.230.09
Residual current by-pass	{110...240}V AC	99.02.8.230.07

