


CARTUCHOS Y LÁMINAS FUSIBLES


Tipo Americano en 250 V y 600 V

CARTUCHO CILÍNDRICO

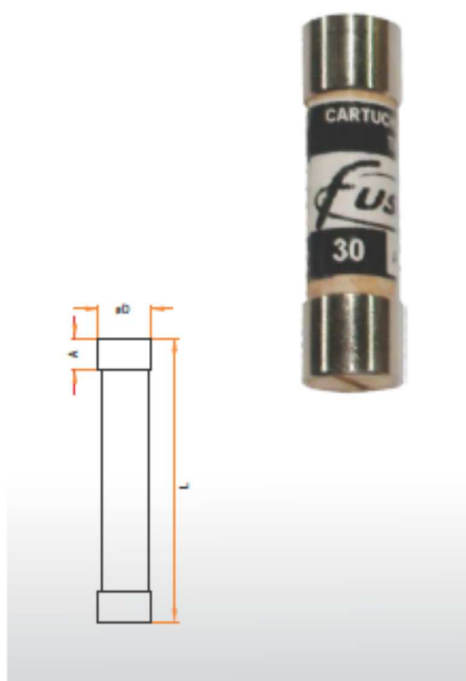

VOLT	AMPER	TAMAÑO	DIMENSIONES			CÓDIGO
			øD	A	L	
250	6	250-1	14,3	11,0	50,8	CF 6-250
	10	250-1	14,3	11,0	50,8	CF 10-250
	15	250-1	14,3	11,0	50,8	CF 15-250
	20	250-1	14,3	11,0	50,8	CF 20-250
	25	250-1	14,3	11,0	50,8	CF 25-250
	30	250-1	14,3	11,0	50,8	CF 30-250
	35	250-2	20,6	15,0	76,0	CF 35-250
	40	250-2	20,6	15,0	76,0	CF 40-250
	45	250-2	20,6	15,0	76,0	CF 45-250
	50	250-2	20,6	15,0	76,0	CF 50-250
600	60	250-2	20,6	15,0	76,0	CF 60-250
	6	600-1	20,6	15,0	127,0	CF 6-600
	10	600-1	20,6	15,0	127,0	CF 10-600
	15	600-1	20,6	15,0	127,0	CF 15-600
	20	600-1	20,6	15,0	127,0	CF 20-600
	25	600-1	20,6	15,0	127,0	CF 25-600
	30	600-1	20,6	15,0	127,0	CF 30-600
	35	600-2	27,0	17,0	139,0	CF 35-600
	40	600-2	27,0	17,0	139,0	CF 40-600
	45	600-2	27,0	17,0	139,0	CF 45-600
	50	600-2	27,0	17,0	139,0	CF 50-600
	60	600-2	27,0	17,0	139,0	CF 60-600

LÁMINA FUSIBLE PARA CARTUCHO CILÍNDRICO

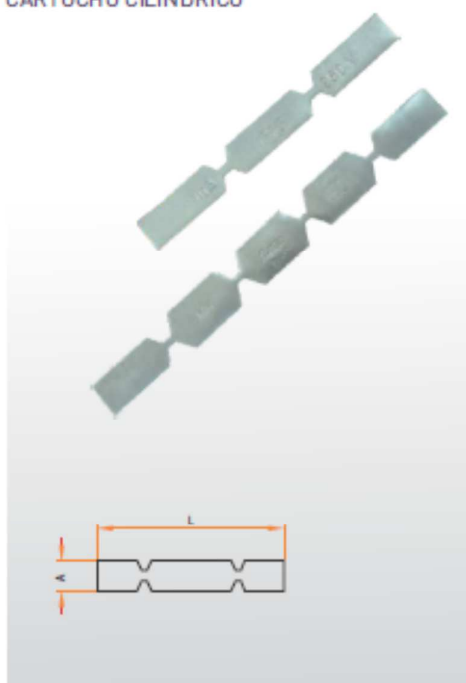


VOLT	AMPER	PARA CARTUCHO TAMAÑO	DIMENSIONES		CÓDIGO
			L	A	
250	6	250-1	56	6,5	LF 6-250
	10	250-1	56	6,5	LF 10-250
	15	250-1	56	6,5	LF 15-250
	20	250-1	56	6,5	LF 20-250
	25	250-1	56	6,5	LF 25-250
	30	250-1	56	6,5	LF 30-250
	35	250-2	81	9,5	LF 35-250
	40	250-2	81	9,5	LF 40-250
	45	250-2	81	9,5	LF 45-250
	50	250-2	81	9,5	LF 50-250
600	60	250-2	81	9,5	LF 60-250
	6	600-1	136	10,0	LF 6-600
	10	600-1	136	10,0	LF 10-600
	15	600-1	136	10,0	LF 15-600
	20	600-1	136	10,0	LF 20-600
	25	600-1	136	10,0	LF 25-600
	30	600-1	136	10,0	LF 30-600
	35	600-2	155	16,0	LF 35-600
	40	600-2	155	16,0	LF 40-600
	45	600-2	155	16,0	LF 45-600
	50	600-2	155	16,0	LF 50-600
	60	600-2	155	16,0	LF 60-600

CARTUCHOS Y LÁMINAS FUSIBLES


Tipo Americano en 250 V y 600 V

CARTUCHO A CUCHILLA

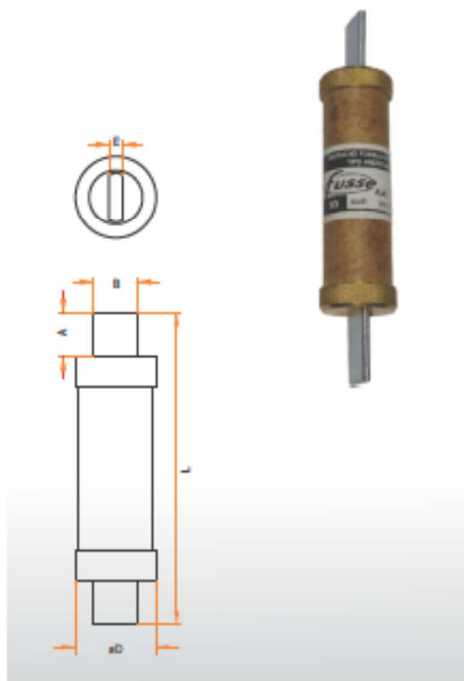

VOLT	AMPER	TAMAÑO	ØD	DIMENSIONES			L	CÓDIGO
				A	B	E		
250	70	250-3	30,0	27,0	19,0	3,2	149,5	CF 70-250
	80	250-3	30,0	27,0	19,0	3,2	149,5	CF 80-250
	100	250-3	30,0	27,0	19,0	3,2	149,5	CF 100-250
	125	250-4	43,0	37,0	28,5	4,7	181,5	CF 125-250
	150	250-4	43,0	37,0	28,5	4,7	181,5	CF 150-250
	175	250-4	43,0	37,0	28,5	4,7	181,5	CF 175-250
	200	250-4	43,0	37,0	28,5	4,7	181,5	CF 200-250
	250	250-5	55,0	50,0	40,0	6,3	220,0	CF 250-250
	300	250-5	55,0	50,0	40,0	6,3	220,0	CF 300-250
	350	250-5	55,0	50,0	40,0	6,3	220,0	CF 350-250
	400	250-5	55,0	50,0	40,0	6,3	220,0	CF 400-250
	500	250-6	67,0	60,0	50,0	6,3	265,0	CF 500-250
	600	250-6	67,0	60,0	50,0	6,3	265,0	CF 600-250
	800	250-5	55,0	50,0	40,0	6,3	220,0	CF 800-250 GM
600	70	600-3	35,0	27,0	19,0	3,2	200,0	CF 70-600
	80	600-3	35,0	27,0	19,0	3,2	200,0	CF 80-600
	100	600-3	35,0	27,0	19,0	3,2	200,0	CF 100-600
	125	600-4	47,0	37,0	28,5	4,7	246,0	CF 125-600
	150	600-4	47,0	37,0	28,5	4,7	246,0	CF 150-600
	175	600-4	47,0	37,0	28,5	4,7	246,0	CF 175-600
	200	600-4	47,0	37,0	28,5	4,7	246,0	CF 200-600
	250	600-5	67,0	50,0	40,0	6,3	293,0	CF 250-600
	300	600-5	67,0	50,0	40,0	6,3	293,0	CF 300-600
	350	600-5	67,0	50,0	40,0	6,3	293,0	CF 350-600
	400	600-5	67,0	50,0	40,0	6,3	293,0	CF 400-600
	500	600-6	80,0	60,0	50,0	6,3	335,0	CF 500-600
	600	600-6	80,0	60,0	50,0	6,3	335,0	CF 600-600

LÁMINA FUSIBLE PARA CARTUCHO A CUCHILLA

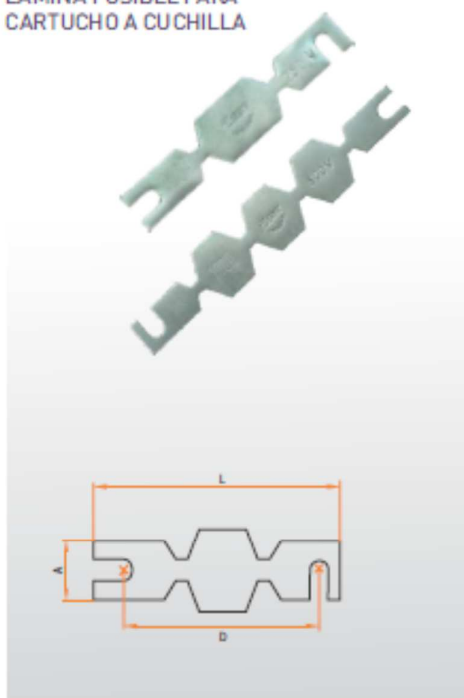

VOLT	AMPER	TAMAÑO PARA CARTUCHO	D	DIMENSIONES		A	CÓDIGO
				L			
250	70	250-3	65,0	77		16	LF 70-250
	80	250-3	65,0	77		16	LF 80-250
	100	250-3	65,0	77		16	LF 100-250
	125	250-4	66,5	84		26	LF 125-250
	150	250-4	66,5	84		26	LF 150-250
	175	250-4	66,5	84		26	LF 175-250
	200	250-4	66,5	84		26	LF 200-250
	250	250-5	66,5	84		26	LF 250-250
	300	250-5	66,5	84		26	LF 300-250
	350	250-5	66,5	84		26	LF 350-250
	400	250-5	66,5	84		26	LF 400-250
	500	250-6	66,5	84		26	LF 500-250
	600	250-6	66,5	84		26	LF 600-250
	800	250-5	66,5	84		26	LF 800-250 GM
600	70	600-3	116,0	129		22	LF 70-600
	80	600-3	116,0	129		22	LF 80-600
	100	600-3	116,0	129		22	LF 100-600
	125	600-4	131,0	150		30	LF 125-600
	150	600-4	131,0	150		30	LF 150-600
	175	600-4	131,0	150		30	LF 175-600
	200	600-4	131,0	150		30	LF 200-600
	250	600-5	131,0	150		30	LF 250-600
	300	600-5	131,0	150		30	LF 300-600
	350	600-5	131,0	150		30	LF 350-600
	400	600-5	131,0	150		30	LF 400-600
	500	600-6	131,0	150		30	LF 500-600
	600	600-6	131,0	150		30	LF 600-600