



AMPLIFIED INDUCTIVE SENSORS

Ø 18

10÷30 V DC - 3 WIRES NPN OR PNP OUTPUT


- Range, 5mm to 8mm - shielded, not shielded
- Short housing models
- Cable or M12 quick connect models
- Operation LED
- Stainless steel housing



IS Series




IDENTIFICATION CODE

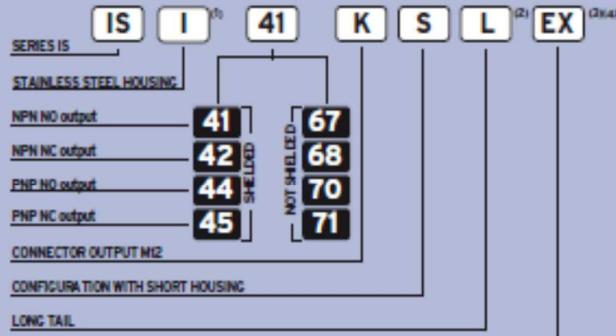

	SHIELDED	NOT SHIELDED
NOMINAL SWITCHING DISTANCE (Sn)	5 mm	8 mm
NOMINAL VOLTAGE	10÷30 VDC (-15/+10%)	
RESIDUAL RIPPLE	≤ 10%	
HYSTERESIS	< 10%	
MAX. OUTPUT CURRENT	200 mA	
RESIDUAL CURRENT	< 10 mA	
VOLTAGE DROP (Sensor ON)	< 1.8 V (I = 100 mA)	
OPERATION LED	Yellow	
SWITCHING FREQUENCY	1000 Hz	
START UP DELAY	≤ 50 ms	
REPEATABILITY	≤ 3%	
SHORT CIRCUIT PROTECTION	Present (self-resetting)	
ELECTRIC PROTECTIONS	Against polarity reversal - inductive loads	
TEMPERATURE LIMITS	- 25 ÷ +60 °C	
PROTECTION DEGREE	IP 67	
CABLE LENGTH	2 m	
CABLE SECTION	3 x 0.25 mm ²	
HOUSING MATERIAL	Nickel-plated brass	
WEIGHT - Cable output -	145 g	
WEIGHT - K connector output -	95 g	


1) Device marking 10 II 3D IP67 T6X.

WIRING DIAGRAMS

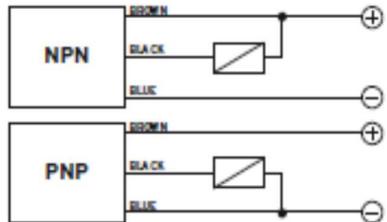

INDUCTIVE

CONNECTION WITH CONNECTOR M12 (K)




View of quadripole male connector

CONTACTS CONFIGURATION


Available	Contacts numbers			
	1	2	3	4
(NO or NC)	+	—	—	NO/NC

DIMENSIONS (mm)


CONFIGURATION WITH CABLE

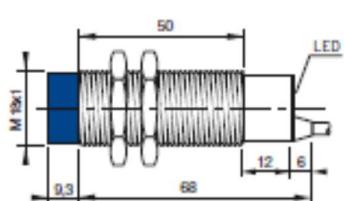

SHORT HOUSING

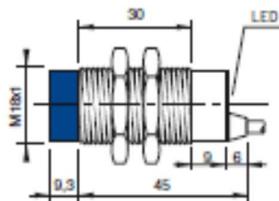

CONNECTOR K

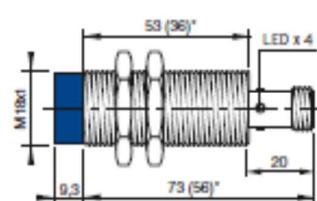

(*) The dimensions into brackets refer to short housing models
Note: the front part in blue refers to not shielded models