



## AMPLIFIED INDUCTIVE SENSORS

Ø 12

10÷30 V DC - 3 WIRES NPN OR PNP OUTPUT

- Range, 2mm to 4mm - shielded, not shielded
- Short housing models
- Cable or M8 and M12 quick connect models
- Operation LED
- Stainless steel housing




IS Series



INDUCTIVE

### IDENTIFICATION CODE

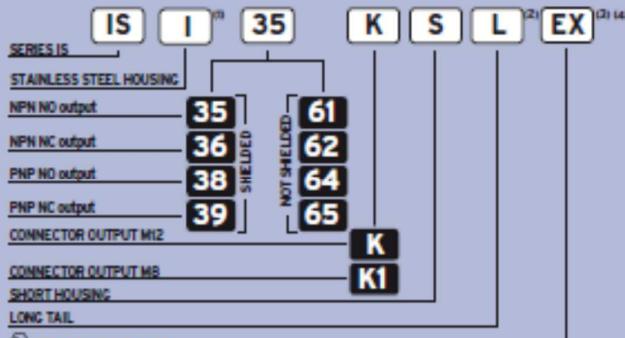


(1) Available only on short housing configurations, connector output M8 not available.  
(2) Long tail option not available with option "K", "K0" and "K1".  
(3) Available only on short stainless steel housing.

	SHIELDED	NOT SHIELDED
NOMINAL SWITCHING DISTANCE (S <sub>n</sub> )	2 mm	4 mm
NOMINAL VOLTAGE	10÷30 VDC (-15/+10%)	
RESIDUAL RIPPLE	≤ 10%	
HYSTERESIS	< 10%	
MAX. OUTPUT CURRENT	200 mA	
RESIDUAL CURRENT	< 10 mA	
VOLTAGE DROP (Sensor ON)	< 1.8 V (I = 100 mA)	
OPERATION LED	Yellow	
SWITCHING FREQUENCY	1000 Hz	
START UP DELAY	≤ 50 ms	
REPEATABILITY	≤ 3%	
SHORT CIRCUIT PROTECTION	Present (self-resetting)	
ELECTRIC PROTECTIONS	Against polarity reversal - inductive loads	
TEMPERATURE LIMITS	- 25 ÷ +60 °C	
PROTECTION DEGREE	IP 67	
CABLE LENGTH	2 m	
CABLE SECTION	3 x 0,25 mm <sup>2</sup>	
HOUSING MATERIAL	Nickel-plated brass	
WEIGHT - Cable output -	110 g	
WEIGHT - K1 connector output -	60 g	
WEIGHT - K connector output -	60 g	

<sup>(4)</sup> Device marking: II 3D IP67 T5X.

### WIRING DIAGRAMS

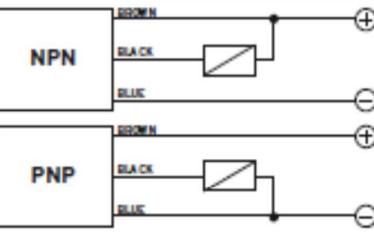

### CONNECTION WITH CONNECTOR M12 (K)



View of quadrupole male connector

### CONTACTS CONFIGURATION

Available	Contacts numbers			
	1	2	3	4
(NO or NC)	+		-	NO/NC

### CONNECTION WITH CONNECTOR M8 (K1)




View of tripole male connector

### CONTACTS CONFIGURATION


Available	Contacts numbers		
	1	3	4
(NO or NC)	+	-	NO/NC

### DIMENSIONS (mm)

CONFIGURATION WITH CABLE

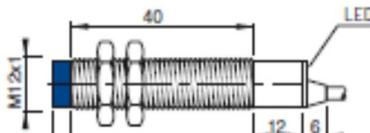


CONNECTOR K



(\*) The dimensions into brackets refer to short housing models.  
Note: the front part in blue refers to not shielded models.



SHORT HOUSING



CONNECTOR K1