

M12 female straight shielded field-wireable Replaced Art.-No. 4227620

Female straight
5-pole, shielded
Clamping range cable entry: 4...6 mm

Image

Vicarious picture

Approvals**Form**

13381

Technical Data


Operating voltage	max. 125 V AC/DC
Operating current per contact (40 °C)	max. 4 A
Connection diameter	max. 0.75 mm ²
Clamping range (cable diameter)	4...6 mm
Housing	CuZn, nickel plated
Protection	IP65 and IP67 when plugged and screwed down (EN 60529)
Temperature range	-25...+85 °C

Commercial data


Net weight	60
Weight unit	gram
Basic unit	pc.
Customs tariff number	85369010
Unit (piece)	1
Limited value	1

Contact layout

Female

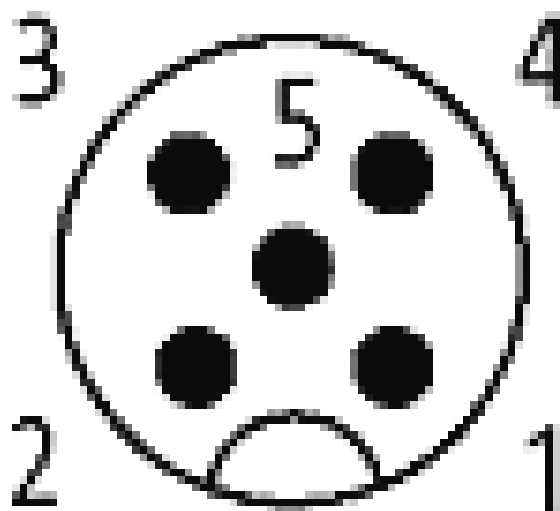

Circuit diagram

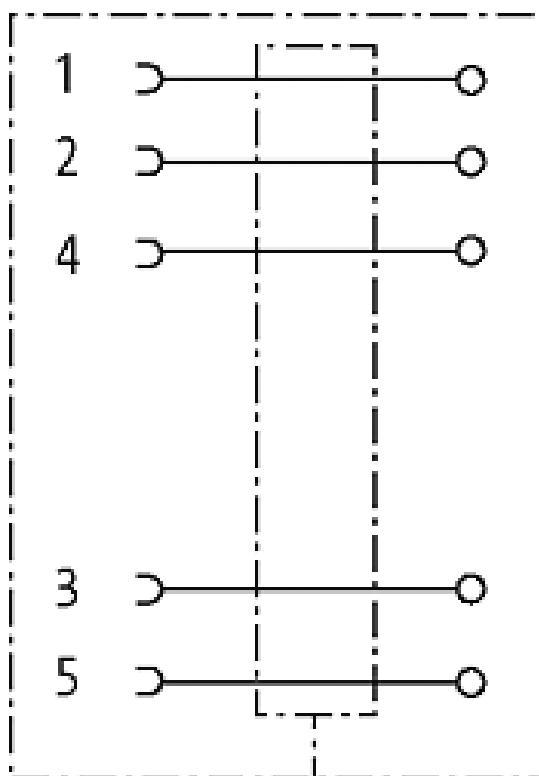

Dimension drawing

