




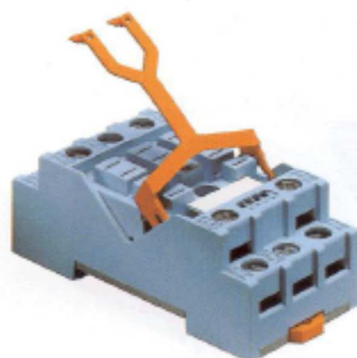


S5-S

Two level screws
Logic wiring

Integrated hold-down clip and removable marking label. DIN rail or panel mountable. EN/DIN and sequential numbering. According to EN60947

Wiring diagram

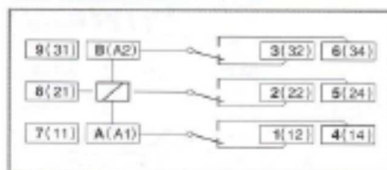

Specifications

Nominal load 16 A / 400 V
Dielectric strength (adjacent screws) 2,5 KV
Dielectric strength (screws / rail) 2,5 KV
Max. screw torque 1,2 Nm
Screw dimensions M3, Pozzi
Wire in-lets capacity:
Solid wire 4 mm² or 2 x 2,25 mm²
Multi-core 22 - 14 AWG



S5-L

S5-P

S5-PO


Solder and printed circuit tags

S5-L Flange panel mountable.

S5-P Printed circuit tags.

S5-PO Printed circuit tags with flange.

Printed circuit lay-out



Specifications

Nominal load 16 A / 400 V
Dielectric strength (adjacent screws) 2,5 KV
Hard brass tin-plated terminals

S7-M


One level, screws on line

S7-16

22,5 mm wide


Socket offers an optimum packing density and is provided with sturdy screws terminals. DIN rail or panel mountable. Integrated clip. Removable marking label EN/DIN and sequential numbering.

Wiring diagram



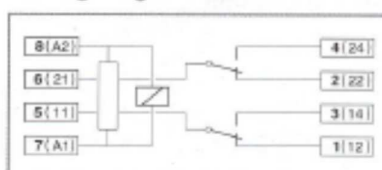


Specifications

Nominal load S7-M 10 A / 250 V
Nominal load S7-16 16 A / 250 V
Dielectric strength (adjacent screws) 2,5 KV
Dielectric strength (screws / rail) 2,5 KV
Max. screw torque 1,2 Nm
Screw dimensions M3, Pozzi
Wire in-lets capacity:
Solid wire 4 mm² or 2 x 2,25 mm²
Multi-core 22 - 14 AWG



S5-S

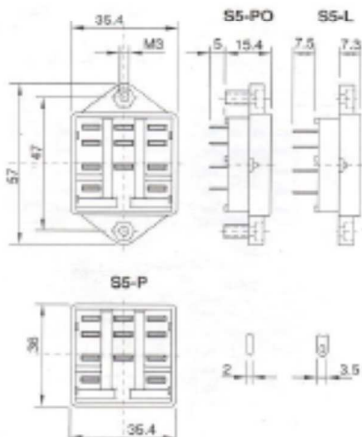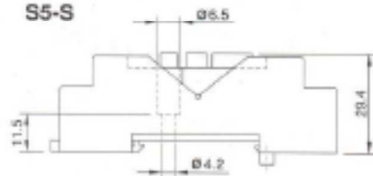

S7-M



S7-16 for C7-A10 relay (16A)

