



PLS-20-PF X-R

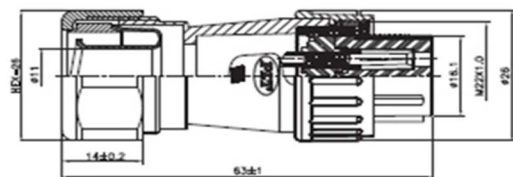

PLS-20-GPF3 X-R 3=轉接3/8"軟管

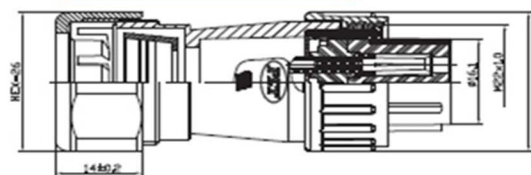


PLS-20-WGPF3 X-R 3=轉接3/8"尼龍管




PLS-20-RCa-R

ACCESSORY:



RUBBER PLATE FOR PLS-20-RM

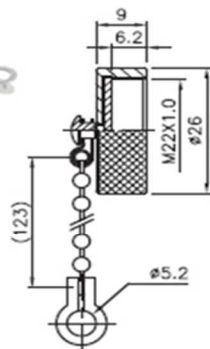

PF

GPF

RM

WGPF


ADM

RCa


ADGM




PLS-20 Series

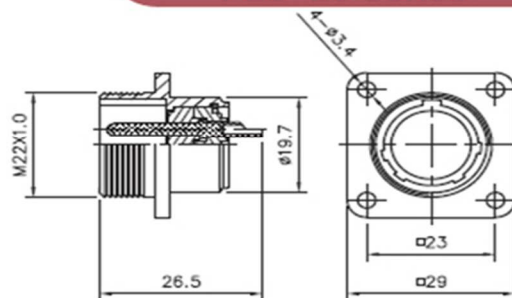

PLS-20-RM-R

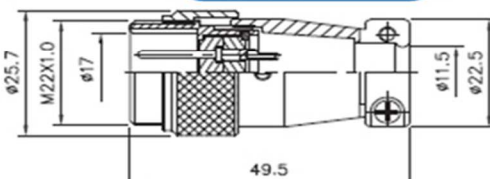

PLS-20-ADM-R

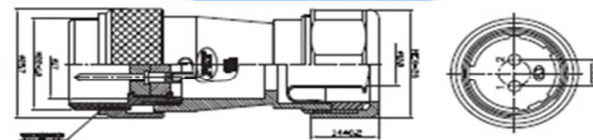

PLS-20-ADGM-R

RUBBER TUBE FOR PLS-20-PF

Número de contactos	2	3	4	7
Configuración de contactos				
Corriente nominal / Voltaje	15 A 250 V	15 A 250 V	10 A 250 V	10 A 250 V
Voltaje límite de operación (CA.V.rms)	250	250	250	250
Tensión soportada (AC.V.rms) 1 minuto	1500	1500	1000	1000
Resistencia de aislamiento (M Ω MIN.) a CC 500 V	2000	2000	2000	2000
Resistencia de contacto (M Ω MÁX.) a CC 1 A	3	3	3	3
Diámetro interior de la soldadura	1.8	1.8	1.6	1.6
Referencia del modelo	PLS-202-PF XR PLS-202-GPF3XR PLS -202- WGPF3	PLS-203-PF XR PLS-203-GPF3XR PLS -203- WGPF3	PLS-204-PF XR PLS-204-GPF3XR PLS -204- WGPF3	PLS-207-PF XR PLS-207-GPF3XR PLS- 207-WGPF3

